
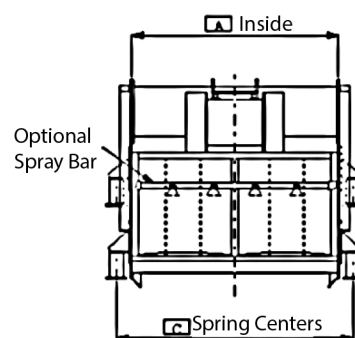
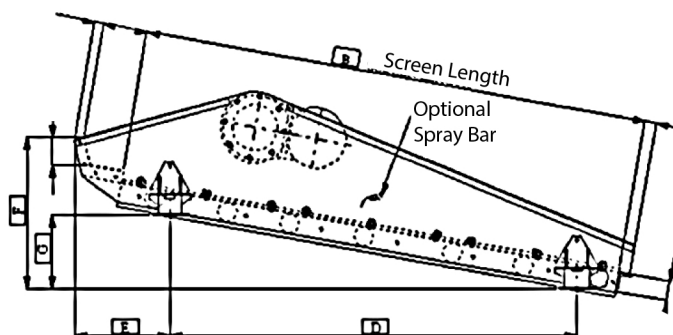


ELLIPTICAL MOTION VIBRATING SCREENS

The model VS vibrating screens from General Kinematics provide a simple, cost-effective solution for your screening needs. With a single motor drive and simple construction, our standard units have few moving parts, which adds up to a cost-effective operation and lower maintenance costs.

The wide range of available screen sizes can be set at various angles and fitted with a variety of screen adjustments to meet your process requirements.

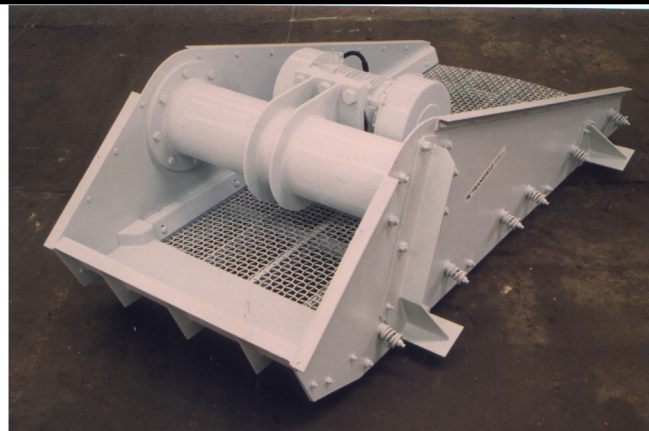

► Elliptical Motion Vibrating Screen Models

MODEL				10° Incline				20° Incline				MOTOR	WEIGHT
	A	B	C	D	E	F	G	D	E	F	G	kW	kg
VS 124	600	1200	856	925	360	565	400	880	345	615	460	.6	260
VS 126	600	1800	856	1130	660	840	525	1250	505	1055	600	0.75	330
VS 128	600	2400	856	1720	660	840	525	1640	505	1160	600	2	450
VS 136	900	1800	1200	1130	660	840	525	1250	505	1055	600	2	560
VS 138	900	2400	1200	1720	660	840	525	1640	505	1160	600	3	750
VS 146	1200	1800	1500	1130	660	840	525	1250	505	1055	600	3	750
VS 148	1200	2400	1500	1720	660	840	525	1640	505	1160	600	3	810
VS 1410	1200	3000	1500	2390	575	1080	630	2280	550	1450	670	4	1010
VS 1412	1200	3600	1500	2970	575	1165	630	2835	550	1640	670	4	1220
VS 1510	1500	3000	1800	2390	575	1080	630	2280	550	1450	670	4	1270
VS 1512	1500	3600	1800	2970	575	1165	630	2835	550	1640	670	4	1450
VS 1514	1500	4200	1800	3265	575	1205	630	2115	550	1735	670	5	1600
VS 1610	1800	3000	2100	2390	575	1080	630	2280	550	1450	670	5	1500
VS 1612	1800	3600	2100	2970	575	1165	630	2835	550	1640	670	5	1700
VS 1614	1800	4200	2100	3260	575	1205	630	3115	550	1735	670	6	2000
VS 1616	1800	4800	2100	3855	575	1310	630	3680	550	1930	670	7	2400

*Above screen data based on 415 Volt 50 Hz., units available for 460/240/220/110 50/60 Hz service.